


TYPE LSF-CH

DEVERSOIR MOUSSE Y

K-FIRE SYSTEMS

FOAM POURER Y

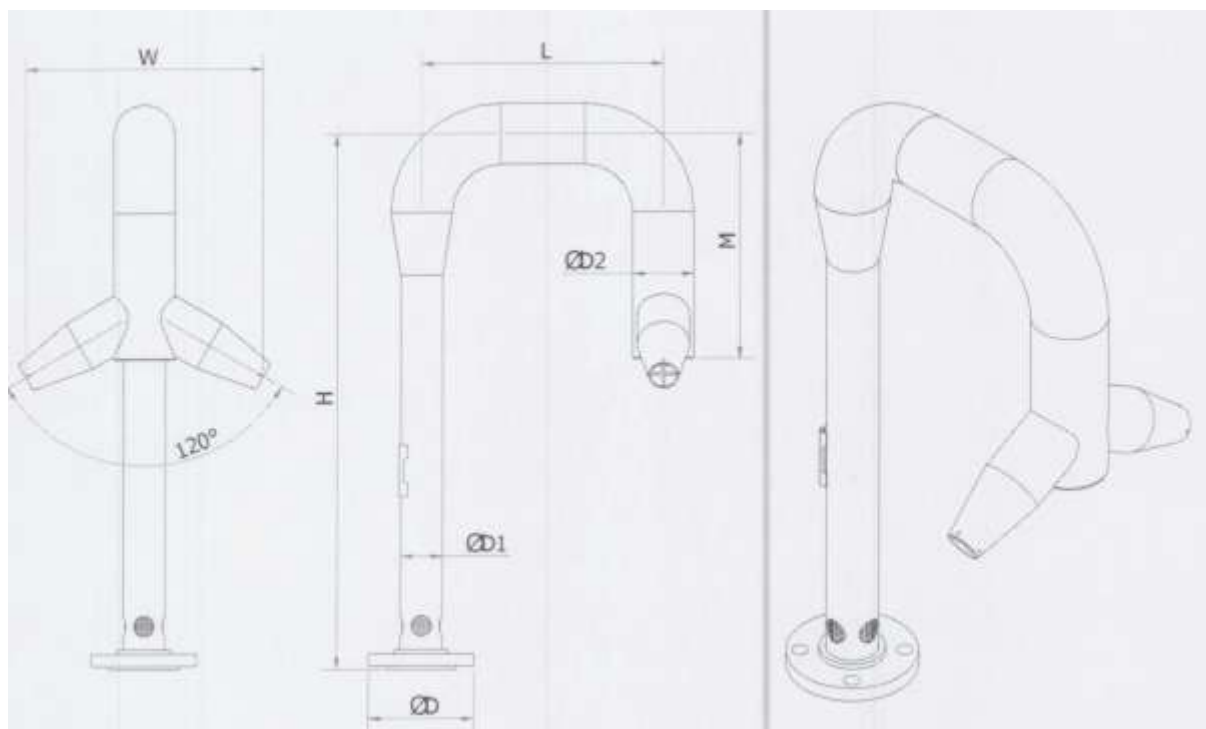

Type	débit/flowrate L/min	diaD Iso or Ansi	D1	D2	W	H	L	M	Poids/weight
LSF-CH-2	200	2"	2"	3"	350	800	700	350	9
LSF-CH-4	400	2"	2"	3"	350	800	700	350	9
LSF-CH-8	800	3"	3"	4"	500	800	700	500	12

specifications

Pression de service 3-12 bars
 corps acier inox 304
 brides acier inox 304
 orifice acier inox 304
 foisonnement de 1 à 4
 finition RAL 3000

Options acier inox 316 L
 autres debits

specifications

operating pressure 3-12 bars
 body stainless steel 304
 flanges stainless steel 304
 orifice stainless steel 304
 expansion ratio de 1 à 4
 finish RAL 3000

stainless steel 316 L
 various flowrates